

NationPlus Double Swing

Steel doors



Description

Fitted with BTS80 Floor Springs to allow 90° swing either way, without threshold.

Available as single or pair of doors. Choice of glazing options.

All double swing doors are made to order.

Door leaf

Thickness: 51mm

Material: 1.2mm corrosion resistant Zintec/Aluzinc sheets as standard, wide variety of colours and finishes available. Also in Stainless Steel.

Infill: Self supporting resin-impregnated honeycomb core as standard.

Construction: Doorblade manufactured from two 1.2mm sheets lockformed together, by bonding two steel skins around a rigid core, using a no-weld construction.

Door frame

Construction: Folded from 1.6mm Zintec/Aluzinc. Screw and tab construction with 4 no. adjustable fixing feet per jamb, variable subframe supplied as standard to accommodate site tolerance of -0/+30mm.

Finishes

Standard: Polyester Powder Coated from standard colour range.

Optional: Polyester Powder Coated from non-standard colour range. PVC laminate from standard range.

Woodgrain PVC laminate.

Stainless steel, brushed, polished or patterned.

Unfinished for site finishing.

Sizes

Size: Doors are custom manufactured in 10mm increments for single openings 690mm to 1390mm and double 1290mm to 2600mm, at heights up to 2900mm.

Contact Stemko Group with your specifications.


Vision panels

Guidance notes: To comply with Part M of the Building Regulations 2004 doors across circulation routes should have visibility glazing. (Vision panels less than 50% of the total door area are exempt from Part L of the Building Regulations)

Construction: Welded construction from 1mm cold rolled steel, screwed together from one side.

Options: Standard glazing is Pyrostem Wired Safety E Glass.

Custom sizes and glass are available to customer requirements.

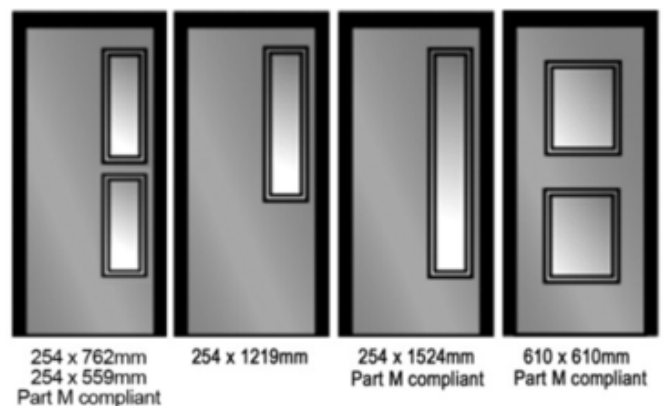

Bespoke commercial doorsets and screens for London fit-outs

Tel: +(0)20 3301 0546 Email: hello@stemkogroup.com www.stemkogroup.com

E&OE. Subject to change without notice